


FHB Series

Fuse Type Isolator Switch

FHB series fuse type isolator is a product with advanced international level in the middle of the 90s. The insulation voltage is 800V, rated voltage up to 690V, rated current up to 630A, rated frequency 50Hz, power distribution and electric circuit high short-circuit current, used as power switch, isolation switch and emergency switch and circuit protection purposes, but generally not directly as a single motor for opening and closing.



Dimensions

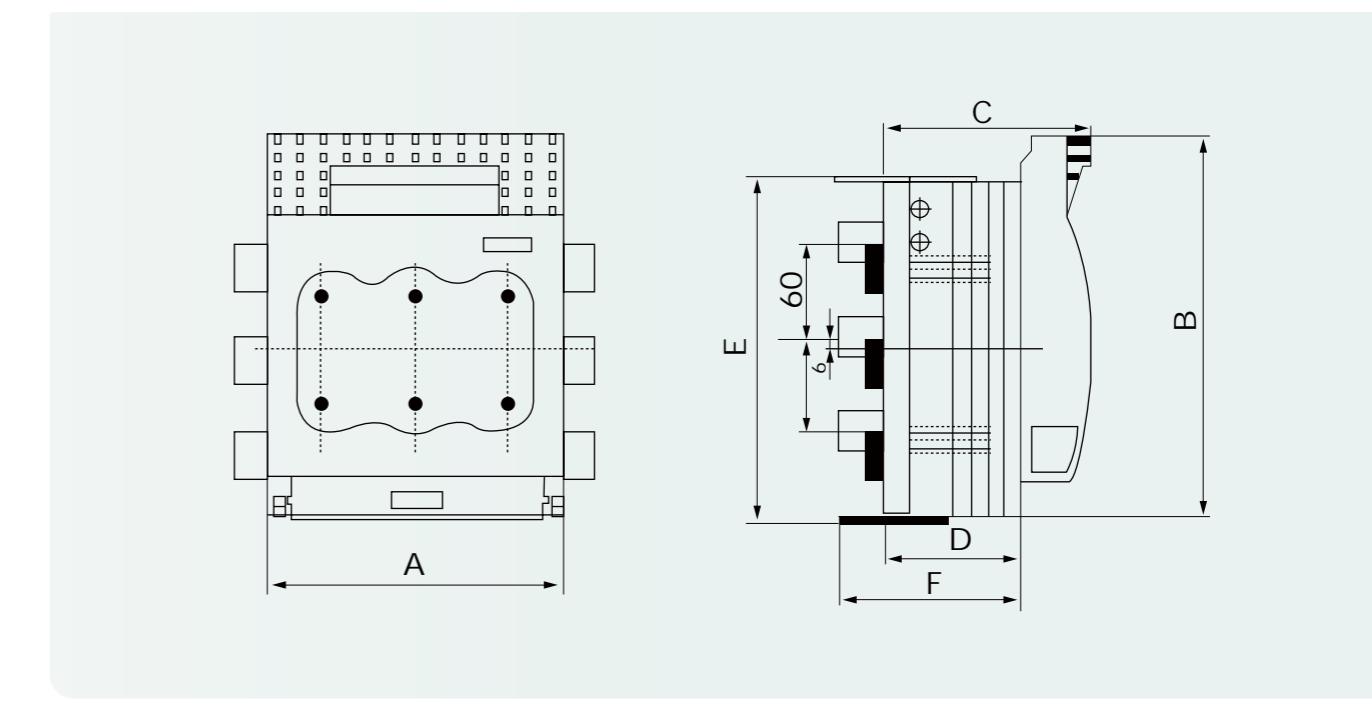

Model/Size	A	B	C	D	E	F
FHB-160/3	160	200	97	60	200	87
FHB-250/3	185	247	128	88	221	87
FHB-400/3	210	290	145	97	268	125
FHB-630/3	256	300	160	112	285	139

Technical Parameters

Conventional heating current I_{th}	160A	250A	400A	630A
Rated insulation voltage U_i	800V/1500V			
Rated operating voltage U_e	AC400V, 690V/DC1000V			
Rated frequency	50Hz			
Rated connection capacity (A r.m.s)	10le			
Rated breaking capacity (A r.m.s)	8le			
Rated limit short-circuit current (r.m.s)	50KA			
Rated operating current	160A	250A	400A	630A
	100A	200A	315A	415A
Mechanical life (times)	5000	3000	2000	1500
Electric life (times)	1000	600	400	300
Weight (3P) kg	1.2	3.6	4.8	6.5
Auxiliary micro switch main parameters	50Hz, AC-15, 230V, 3A			